

Advertisment Player 32 inch

Features


- Easy, Customizable and Reliable
- In built web server
- Content Management
- User Management
- User Define Screen Template
- Storage Management
- Multilanguage support

- Time Scheduling Setting
- Scrolling Text
- Font Settings
- Logo Settings
- Product and Money Exchange
- Inbuilt Template

Specification

RAM DDR3 IG Built-in storage capacity NAND FLASH 8GB LVDS interface (single, 6-bit dual, 8-bit dual). Support maximum resolution 1920x1080, support 7"-82" display LED backlight 12V LCD voltage LCD voltage 3,3V/5V/12V optional With RJ45 interface, support Ethernet. Equipped with wifi8BT module, support Wi-Fi 802.11b/g/n protocol. Support BT3.0/BT4.0 Image rotation RTC Built-in real-time clock power supply battery Support DVP interface camera, up to 500W pixels Support USB camera 3 USB HOST (I motherboard, 2 small boards), 1 USB OTG 1 serial port. Support external connection serial device module 1 group I2C port SD card, maximum support 32GB D class large built-in speaker, 8 0/3W Support microphone Audio frequency MP3, WMA, WAV, APE, FLAC, AAC, OCG, M4A, 3GPP format Video Support Various picture formats such as JPC, BMP, PNC, etc. and support rotation/slide show/picture zoom function Power Adapter Input: AC100-240V.50-60HZ, output: DC12V 3A		
Built-in storage capacity NAND FLASH 8GB	CPU	•
LVDS interface LVDS interface (single, 6-bit dual, 8-bit dual). Support maximum resolution 1920x1080, support 7"-82" display	RAM	DDR3 1G
1920x1080, support 7"-82" display LED backlight 12V LCD voltage LCD voltage 3.3V/5V/12V optional With RJ45 interface, support Ethernet. Equipped with wifi&BT module, support Wi-Fi 802.11b/g/n protocol. Support BT3.0/BT4.0 Image rotation Image rotation support 0 degree, 90 degree, 180 degree, 270 degree manual/automatic rotation, support gravity sensor function RTC Built-in real-time clock power supply battery Support DVP interface camera, up to 500W pixels Support USB camera 3 USB HOST (1 motherboard, 2 small boards), 1 USB OTG 1 serial port. Support external connection serial device module 1 group I2C port SD card, maximum support 32GB D class large built-in speaker, 8 Ω/3W Support microphone Audio frequency MP3, WMA, WAV, APE, FLAC, AAC, OGG, M4A, 3GPP format Video Video Support 1080P decoding of H.264, VP8, RV, WMV, AVS, H.263, MPEG4 and other video formats, online videos such as YouTube, up to 1080P, HTML5 video broadcast, Flash 10.1 playback Support various picture formats such as JPC, BMP, PNG, etc. and support rotation/slide show/picture zoom function	Built-in storage capacity	NAND FLASH 8GB
Network With R345 interface, support Ethernet.	Display interface	
With RJ45 interface, support Ethernet. Equipped with wifi&BT module, support Wi-Fi 802.11b/g/n protocol. Support BT3.0/BT4.0 Image rotation Image rotation support 0 degree, 90 degree, 180 degree, 270 degree manual/ automatic rotation, support gravity sensor function RTC Built-in real-time clock power supply battery Support DVP interface camera, up to 500W pixels Support USB camera 3 USB HOST (I motherboard, 2 small boards), 1 USB OTC 1 serial port. Support external connection serial device module 1 group I2C port SD card, maximum support 32CB D class large built-in speaker, 8 \(\Omega\)/3W Support microphone Audio frequency MP3, WMA, WAV, APE, FLAC, AAC, OGG, M4A, 3GPP format Video Support 1080P decoding of H.264, VP8, RV, WMV, AVS, H.263, MPEC4 and other video formats, online videos such as YouTube, up to 1080P, HTML5 video broadcast, Flash 10.1 playback Support various picture formats such as JPG, BMP, PNG, etc. and support rotation/slide show/picture zoom function	LED backlight	12V
Equipped with wifi&BT module, support Wi-Fi 802.11b/g/n protocol. Support BT3.0/BT4.0	LCD voltage	LCD voltage 3.3V/5V/12V optional
Support BT3.0/BT4.0 Image rotation Image rotation support 0 degree, 90 degree, 180 degree, 270 degree manual/automatic rotation, support gravity sensor function Built-in real-time clock power supply battery	Network	With RJ45 interface, support Ethernet.
automatic rotation, support gravity sensor function Built-in real-time clock power supply battery Support DVP interface camera, up to 500W pixels Support USB camera 3 USB HOST (I motherboard, 2 small boards), 1 USB OTG 1 serial port. Support external connection serial device module 1 group I2C port SD card, maximum support 32CB D class large built-in speaker, 8 Ω/3W Support microphone Audio frequency MP3, WMA, WAV, APE, FLAC, AAC, OGG, M4A, 3GPP format Video Video Support 1080P decoding of H.264, VP8, RV, WMV, AVS, H.263, MPEG4 and other video formats, online videos such as YouTube, up to 1080P, HTML5 video broadcast, Flash 10.1 playback Support various picture formats such as JPG, BMP, PNG, etc. and support rotation/slide show/picture zoom function		
Support DVP interface camera, up to 500W pixels Support USB camera 3 USB HOST (1 motherboard, 2 small boards), 1 USB OTG 1 serial port. Support external connection serial device module 1 group I2C port SD card, maximum support 32GB D class large built-in speaker, 8 Ω/3W Support microphone Audio frequency MP3, WMA, WAV, APE, FLAC, AAC, OGG, M4A, 3GPP format Support 1080P decoding of H.264, VP8, RV, WMV, AVS, H.263, MPEG4 and other video formats, online videos such as YouTube, up to 1080P, HTML5 video broadcast, Flash 10.1 playback Support various picture formats such as JPG, BMP, PNG, etc. and support rotation/slide show/picture zoom function	Image rotation	
Support USB camera 3 USB HOST (1 motherboard, 2 small boards), 1 USB OTG 1 serial port. Support external connection serial device module 1 group I2C port SD card, maximum support 32GB D class large built-in speaker, 8 Ω/3W Support microphone Audio frequency MP3, WMA, WAV, APE, FLAC, AAC, OGG, M4A, 3GPP format Support 1080P decoding of H.264, VP8, RV, WMV, AVS, H.263, MPEG4 and other video formats, online videos such as YouTube, up to 1080P, HTML5 video broadcast, Flash 10.1 playback Support various picture formats such as JPG, BMP, PNG, etc. and support rotation/slide show/picture zoom function	RTC	Built-in real-time clock power supply battery
Interface equipment Iserial port. Support external connection serial device module 1 group I2C port SD card, maximum support 32GB D class large built-in speaker, 8 Ω/3W Support microphone Audio frequency MP3, WMA, WAV, APE, FLAC, AAC, OGC, M4A, 3GPP format Support 1080P decoding of H.264, VP8, RV, WMV, AVS, H.263, MPEG4 and other video formats, online videos such as YouTube, up to 1080P, HTML5 video broadcast, Flash 10.1 playback Support various picture formats such as JPG, BMP, PNG, etc. and support rotation/slide show/picture zoom function	Interface equipment	Support DVP interface camera, up to 500W pixels
Interface equipment 1 serial port. Support external connection serial device module 1 group I2C port SD card, maximum support 32GB D class large built-in speaker, 8 Ω/3W Support microphone Audio frequency MP3, WMA, WAV, APE, FLAC, AAC, OGG, M4A, 3GPP format Support 1080P decoding of H.264, VP8, RV, WMV, AVS, H.263, MPEG4 and other video formats, online videos such as YouTube, up to 1080P, HTML5 video broadcast, Flash 10.1 playback Support various picture formats such as JPG, BMP, PNG, etc. and support rotation/slide show/picture zoom function		Support USB camera
1 group I2C port SD card, maximum support 32GB D class large built-in speaker, 8 Ω/3W Support microphone Audio frequency MP3, WMA, WAV, APE, FLAC, AAC, OGG, M4A, 3GPP format Support 1080P decoding of H.264, VP8, RV, WMV, AVS, H.263, MPEG4 and other video formats, online videos such as YouTube, up to 1080P, HTML5 video broadcast, Flash 10.1 playback Support various picture formats such as JPG, BMP, PNG, etc. and support rotation/slide show/picture zoom function		3 USB HOST (1 motherboard, 2 small boards), 1 USB OTG
SD card, maximum support 32GB D class large built-in speaker, 8 Ω/3W Support microphone MP3, WMA, WAV, APE, FLAC, AAC, OGG, M4A, 3GPP format Support 1080P decoding of H.264, VP8, RV, WMV, AVS, H.263, MPEG4 and other video formats, online videos such as YouTube, up to 1080P, HTML5 video broadcast, Flash 10.1 playback Support various picture formats such as JPG, BMP, PNG, etc. and support rotation/slide show/picture zoom function		1 serial port. Support external connection serial device module
D class large built-in speaker, 8 \(\Omega/3W \) Support microphone Audio frequency MP3, WMA, WAV, APE, FLAC, AAC, OGG, M4A, 3GPP format Support 1080P decoding of H.264, VP8, RV, WMV, AVS, H.263, MPEG4 and other video formats, online videos such as YouTube, up to 1080P, HTML5 video broadcast, Flash 10.1 playback Support various picture formats such as JPG, BMP, PNG, etc. and support rotation/slide show/picture zoom function		1 group I2C port
Support microphone Audio frequency MP3, WMA, WAV, APE, FLAC, AAC, OGG, M4A, 3GPP format Support 1080P decoding of H.264, VP8, RV, WMV, AVS, H.263, MPEG4 and other video formats, online videos such as YouTube, up to 1080P, HTML5 video broadcast, Flash 10.1 playback Support various picture formats such as JPG, BMP, PNG, etc. and support rotation/slide show/picture zoom function		SD card, maximum support 32GB
Audio frequency MP3, WMA, WAV, APE, FLAC, AAC, OGG, M4A, 3GPP format Support 1080P decoding of H.264, VP8, RV, WMV, AVS, H.263, MPEG4 and other video formats, online videos such as YouTube, up to 1080P, HTML5 video broadcast, Flash 10.1 playback Support various picture formats such as JPG, BMP, PNG, etc. and support rotation/slide show/picture zoom function		D class large built-in speaker, 8 Ω/3W
Support 1080P decoding of H.264, VP8, RV, WMV, AVS, H.263, MPEG4 and other video formats, online videos such as YouTube, up to 1080P, HTML5 video broadcast, Flash 10.1 playback Support various picture formats such as JPG, BMP, PNG, etc. and support rotation/slide show/picture zoom function		Support microphone
Video other video formats, online videos such as YouTube, up to 1080P, HTML5 video broadcast, Flash 10.1 playback Support various picture formats such as JPG, BMP, PNG, etc. and support rotation/slide show/picture zoom function	Audio frequency	MP3, WMA, WAV, APE, FLAC, AAC, OGG, M4A, 3GPP format
Image support rotation/slide show/picture zoom function	Video	other video formats, online videos such as YouTube, up to 1080P, HTML5
Power Adapter Input: AC100-240V.50-60HZ, output: DC12V 3A	Image	
	Power Adapter	Input: AC100-240V.50-60HZ, output: DC12V 3A

Dimension(mm/inch)

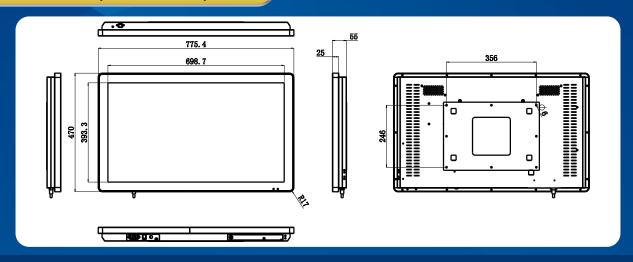

Mailing Address

VOSTOK Trading L.L.C, 304,3rd Floor,Al Tawhidi Building, Khaleed Bin Waleed Road, P.O. Box: 27106 - Dubai, UNITED ARAB EMIRATES.

Contact Details

Tel: (+971 4) 3558816 Fax: (+971 4) 3558817 Email: sales1@snappy.ae /

Email: sales1@snappy.ae / sales2@snappy.ae / sales3@snappy.ae

Social Media

- www.facebook.com/pages/snappyqms/771955106229149
- twitter.com/snappyqms
- snappyqms.blogspot.in/
- +91 8870138341