

1.3 Megapixel HD Ultra-smart Network Pinhole Camera

IP- PH13FC









Features

- ▶ 1/3" 1.3Megapixel progressive scan CMOS
- ▶ Max 25/30fps @1.3MP (1280 x 960)
- ▶ Day/Night(Electronic), 3DNR, AWB,AGC,BLC
- ▶ Smart detection:
 - Face detection
 - Tripwire detection
 - Intrusion detection
 - Scene change detection
- ▶ 3.6mm fixed lens
- ▶ Micro SD memory, PoE

Technical Specifications

Model		IP-PH13FC	
Camera			
Image Sensor		1/3" 1.3Megapixel progressive scan CMOS	
Effective Pixels		1280(H)x960(V)	
Scanning System		Progressive	
Electronic Shutter Speed		Auto/Manual, 1/3(4)~1/100000s	
Min. Illumination		0.01Lux/F2.8(Color), 0.001Lux/F2.8(B/W)	
S/N Ratio		More than 50dB	
Video Output		N/A	
Camera Features			
Max. IR LEDs Length		N/A	
Day/Night		Auto(Electronic)/Color/B/W	
Backlight Compensation		BLC / HLC / WDR(120dB)	
White Balance		Auto/Manual	
Gain Control		Auto/Manual	
Noise Reduction		3D	
Privacy Masking		Up to 4 areas	
Lens			
Focal Length		3.6mm	
Max Aperture		F2.8	
Focus Control		Manual	
Angle of View		77	
Lens Type		Fixed lens	
Mount Type		Board-in Type	
Video			
Compression		H.264/ MJPEG	
Resolution		1.3M(1280×960)/720P(1280×720)/D1(704×576)/CIF(352×288)	
Frame Rate	Main Stream	1.3M/720P(1 ~ 25/30fps)	
	Sub Stream	D1/CIF(1 ~ 25/30fps)	
	Third Stream	720P/D1/CIF(1~25/30fps)	
Bit Rate		H.264: 48K ~ 8192Mbps	
Audio			
Compression		G.711a / G.711u/PCM	
Interface		1/1 channel In/Out	
Smart Function			
Smart detection		Tripwire	Scene Change
		Intrusion	Abandoned/Missing
			Audio detect
			Face detect
Network			
Ethernet		RJ-45 (10/100/1000Base-T)	
Wi-Fi		N/A	
Protocol		IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour	
Compatibility		ONVIF ,PSIA,CGI	
Max. User Access		20 users	
Smart Phone		iPhone, iPad, Android, Windows Phone	
Auxiliary Interface			
Memory Slot		Micro SD, Max 128GB	
RS485		N/A	
Alarm		1/1 channel In/Out	
General			
Power Supply		DC12V, PoE (802.3af)	
Power Consumption		Max 7W	
Working Environment		-30° C~+60°C, Less than 95% RH	
Ingress Protection		N/A	
Dimensions		109.7mm× 82.8mm× 24.0mm	
Weight		0.46Kg	

Dimensions (mm)

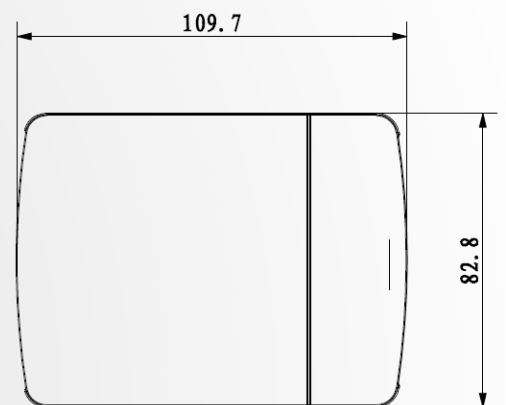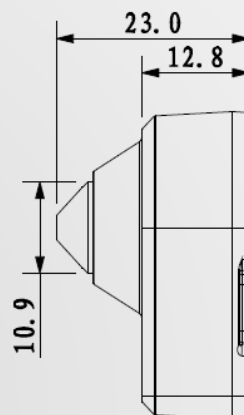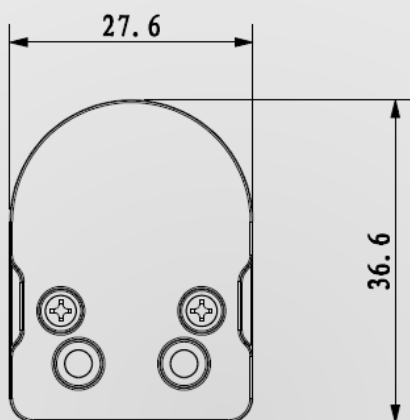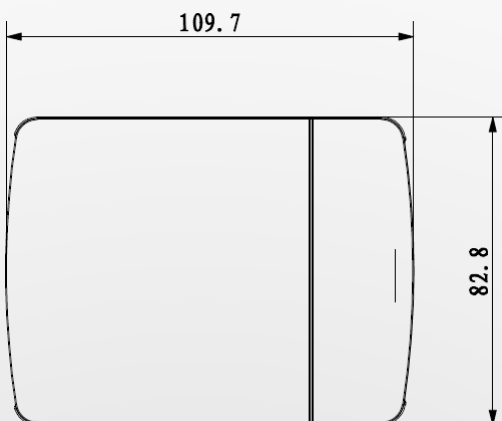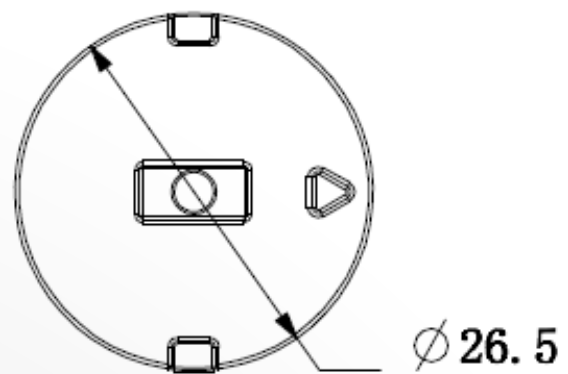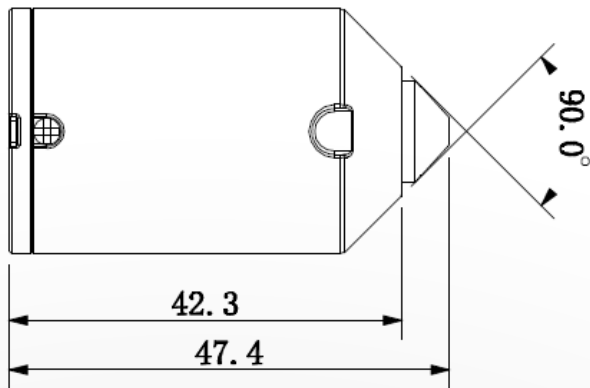

Mailing Address

VOSTOK Trading L.L.C,
304, 3rd Floor, Al Tawhidi Building,
Khaleed Bin Waleed Road,
P.O. Box: 27106 - Dubai,
UNITED ARAB EMIRATES.

www.snappy.ae

Contact Details

Tel: (+971 4) 3558816
Fax: (+971 4) 3558817
Email : sales1@snappy.ae /
sales2@snappy.ae /
sales3@snappy.ae