

# 12 Megapixel Ultra HD Network Bullet Camera





**IP-B12MVFC**

## Features

- 1/1.7" 12Megapixel progressive scan CMOS
- Support H.264&MJPEG dual codec
- Max 15fps@12Mp(4000× 3000),25/30fps@4K(3840x2160)
- DWDR,Day/Night(ICR), 3DNR, AWB, AGC, BLC
- Multiple network monitoring: Web viewer, Snappy Universal CMS
- 4.1mm ~16.4mm motorized lens
- Max. IR LEDs Length 50m
- IP67, PoE

## Dimensions (mm)

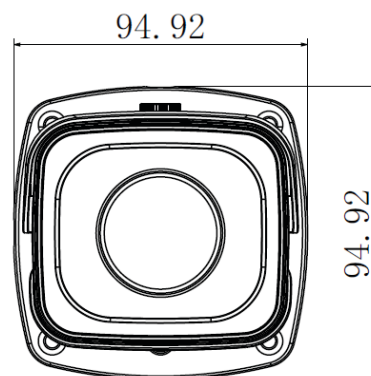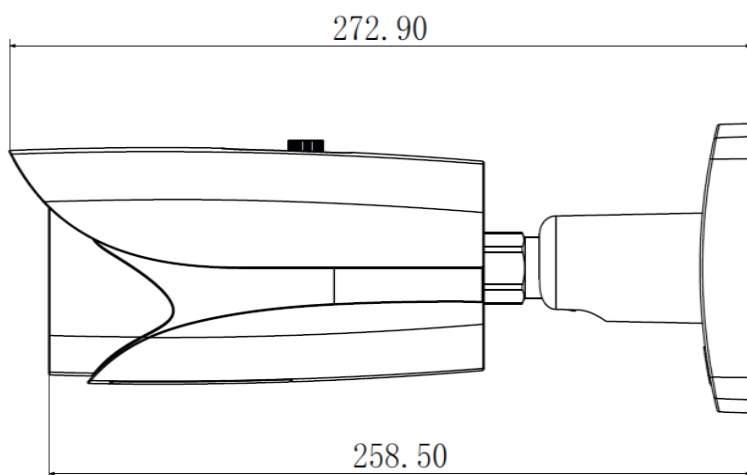

## Technical Specifications

Model	<b>IP-B12MVFC</b>	
<b>Camera</b>		
Image Sensor	1/1.7" 12Megapixel CMOS	
Effective Pixels	4000(H)x3000(V)	
Scanning System	Progressive	
Electronic Shutter Speed	Auto/Manual, 1/3 (4)~1/100 000s	
Min. Illumination	0.05Lux/F1.4(Color); 0Lux/F1.4(IR on)	
S/N Ratio	More than 5 0dB	
Video Output	1 channel BNC (1.0Vp-p,75Ω)	
<b>Camera Features</b>		
Max. IR LEDs Length	50m	
Day/Night	Auto(ICR)/Color/B/W	
Backlight Compensation	BLC / HLC / DWDR	
White Balance	Auto/Sunny/Night/Outdoor/Customized	
Gain Control	Auto/Manual	
Noise Reduction	3D	
Privacy Masking	Up to 4 areas	
EIS	Support	
Ultra Defog	Support	
Smart focus	Auto focus	
<b>Lens</b>		
Focal Length	4.1-16.4mm	
Max Aperture	F1.53	
Focus Control	Manual	
Angle of View	H: 84.5 ° ~ 34 °	
Lens Type	Zoom lens/Auto Iris	
<b>Video</b>		
Compression	H.264/H.264B/H.264H/ MJPEG	
Resolution	12M(4000x3000) /8M(4096 ×2160)/ 8M(3840 ×2160)/ 1080P(1920×1080)/720P(1280×720) /D1(704×576) /CIF(352×288)	
Frame Rate	Main Stream	12M(1~15fps)/ 8M(4096x2160) (1~25/30fps)
	Sub Stream	D1/CIF(1 ~ 25/30fps)
	Third Stream	1080P/720P/D1(1 ~ 25/30fps)
Bit Rate	H.264: 32Kbps~ 16Mbps	
ROI	Up to 4 areas	
<b>Audio</b>		
Compression	G.711a / G.711u /AAC	
Interface	1/1 channel In/Out	
<b>Smart Function</b>		
Smart detection	Tripwire	
	Intrusion	
	Scene change	

	Missing/Abandoned
	Audio detect
	Defocus detect
	Face detect
<b>Network</b>	
Ethernet	RJ-45 (10/100 /1000 Base-T)
Wi-Fi	N/A
Protocol	IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour, 802.1x
Compatibility	ONVIF, PSIA, CGI
Max. User Access	20 users
Smart Phone	iPhone, iPad, Android, Windows Phone
<b>Auxiliary Interface</b>	
Memory Slot	Micro SD, Max 128GB
RS485	N/A
Alarm	2/1 channel In/Out
<b>General</b>	
Power Supply	DC12V( AC24V optional) , PoE (802.3a t)
Power Consumption	Max 24W (IR on)
Working Environment	-30°C~+60°C, Less than 95% RH
Ingress Protection	IP67
Dimensions	272.9 mm×94.3 mm×94.3 mm
Weight	0.8Kg

### Accessory (optional)



### Mailing Address

Snappy  
Orlyplein 85  
1043 DS Amsterdam  
The Netherlands

### Contact Details

Tel : +31 (0) 204037397  
Fax : +31 (0) 204037310  
Email : sales1@snappyeurope.com  
sales2@snappyeurope.com  
Website : www.snappyeurope.com