



2MP Starlight Ultra-smart Network (IR) Dome Camera



IP-D2MVFIRC

Features

- 1/1.9" 2 Megapixel progressive scan CMOS
- Support H.264,MJPEG dual codec
- Smart triple streams supported
- Max 50/60fps@1080P
- Light-Hunt: 0.005Lux/F1.65 (Color)
- Ultra WDR (Wide Dynamic Range) up to 120dB
- Ultra 3D DNR
- Ultra Defog, ROI, EIS
- Smart detection
- Intelligent Function
- 4~8mm varifocal motorized lens
- Micro SD memory, IP66, IK10, PoE

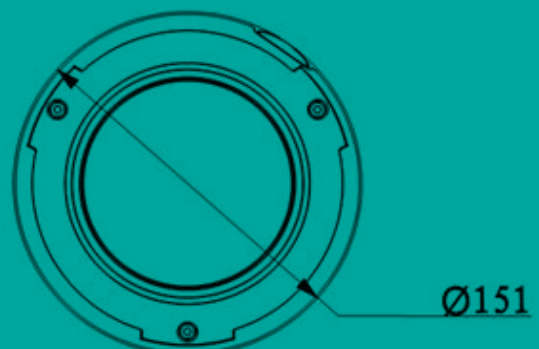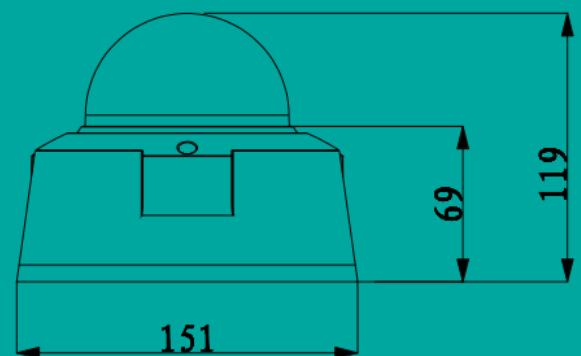


Ordering Information

Without IR model - **IP-D2MVFC**

Technical Specifications

Model		
Camera		
Image Sensor		1/1.9" 2Megapixel progressive scan Exmor CMOS
Effective Pixels		1920(H)x1 080(V)
Scanning System		Progressive
Electronic Shutter Speed		Auto/Manual 1/3(4)~1/10000
Min. Illumination		0.005 Lux/F1.65 (Color), 0Lux/F1.65(IR on)
S/N Ratio		More than 50dB
Video Output		1 port
Camera Features		
Max. IR LEDs Length		30m
Day/Night		Auto(ICR)/Color/B/W
Backlight Compensation		BLC / HLC / WDR (120 dB)
White Balance		Auto
Gain Control		Auto/Manual
Noise Reduction		3D
Privacy Masking		Up to 4 areas
Lens		
Focal Length		4~8mm
Max Aperture		F1.65
Focus Control		Auto
Angle of View		H: 105°(Wide) ~56°(Tele)
Lens Type		Motorized /Auto Iris(DC)
Mount Type		Board-in Type
Video		
Compression		H.264 / M JPEG
Resolution		1080P(1920×1080) / 720P(1280×720) /D1(704×576) /CIF(352×288)
Frame Rate	Main Stream	1080P/720P (1~50/60fps)
	Sub Stream	D1/CIF(1 ~ 50/60 fps)
	Third Stream	1080P/720P /D1 (1~25/30fps)
Bit Rate		H.264: 32K ~ 8192Kbps
Audio		
Compression		G.711a / G.711u
Interface		1/1 channel In/Out
Smart Function		
Smart detection		Tripwire
		Intrusion
		Scene change
		Missing/Abandoned
		Audio detect
Intelligent function		People counting

	Heat map
Network	
Ethernet	RJ-45 (10/100Base -T)
Wi-Fi	N/A
Protocol	IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour
ONVIF	ONVIF PSIA CGI
Max. User Access	20 users
Smart Phone	iPhone, iPad, Android, Windows Phone
Auxiliary Interface	
Memory Slot	Micro SD, Max 64GB
RS485	N/A
Alarm	1/1 channel In/Out
PIR Sensor Range	N/A
General	
Power Supply	DC12V/AC24V, PoE (802.3af)
Power Consumption	<12 W (IR on: +2W)
Working Environment	-30°C~+60°C, Less than 95%RH
Ingress Protection	IP66
Vandal Resistance	IK10
Dimensions	Φ151mm×119mm
Weight	1.25kg



Mailing Address

Snappy
Orlyplein 85
1043 DS Amsterdam
The Netherlands

Contact Details

Tel : +31 (0) 204037397
Fax : +31 (0) 204037310
Email : sales1@snappyeurope.com
sales2@snappyeurope.com
Website : www.snappyeurope.com