



1.3MP HD WDR Network Camera



Features

- 1/3" 1.3Megapixel progressive scan CMOS
- Support H.264&MJPEG dual codec
- 25/30fps@1.3Mp(1280× 960)
- Smart Detection supported
- WDR(120dB), Day/Night(ICR), 3DNR,AWB,AGC,BLC
- Multiple network monitoring:
Web viewer, Snappy Universal CMS
- 2/1 Alarm in/out, 1/1 audio
in/out(Built-in Mic)
- Auto back focus(ABF)
- Micro SD memory, PoE

Dimensions (mm)

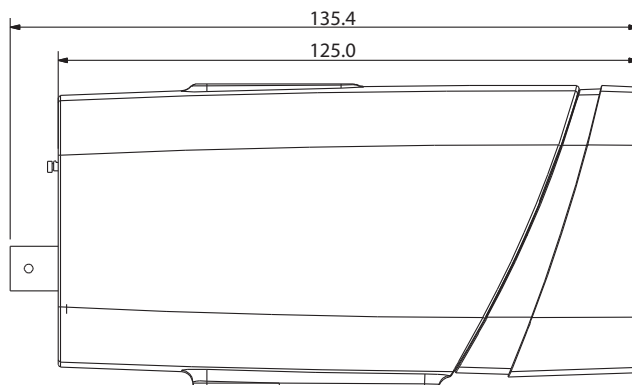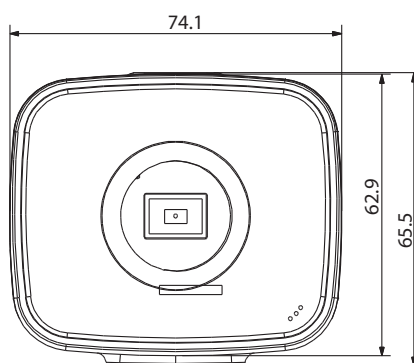

IP-BX103C

Technical Specifications

Model		IP-BX103C
Camera		
Image Sensor		1/3" 1.3Megapixel progressive scan CMOS
Effective Pixels		1280(H)x960(V)
Scanning System		Progressive
Electronic Shutter Speed		Auto/Manual, 1/3 (4)~1/10 0000s
Min. Illumination		0. 01Lux/F1.2 (Color), 0.001Lux/F1.2(B/W)
S/N Ratio		More than 50dB
Video Output		1 channel BNC (1.0Vp-p, 75Ω)
Camera Features		
Max. IR LEDs Length		N/A
Day/Night		Auto(ICR)/Color/B/W
Backlight Compensation		BLC / HLC / WDR (120dB)
White Balance		Auto/Sunny/Night/Outdoor/Customized
Gain Control		Auto/Manual
Noise Reduction		3D
Privacy Masking		Up to 4 areas
Ultra Defog		Support
Smart focus		ABF
Lens		
Mount Type		C/CS
Video		
Compression		H.264/H.264B/H.264H/ MJPEG
Resolution		1.3M (1280×960)/720P(1280×720)/D1(704×576)/CIF(352×288)
Frame Rate	Main Stream	1.3M (1 ~ 25/30fps)
	Sub Stream	D1/CIF(1 ~ 25/30fps)
	Third Stream	720P (1-14/7fps)
Bit Rate		H.264: 32K ~ 10M bps
ROI		Up to 4 areas
Audio		
Compression		G.711a / G.711u /AAC
Interface		1/1 channel In/Out (Built-in Mic)
Smart Function		
Smart detection	Tripwire	
	Intrusion	
	Abandoned/Missing	
	Scene Change	
	Audio detect	
	Face detect	
Network		
Ethernet		RJ-45 (10/100Base-T)

Wi-Fi	N/A
Protocol	IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour, 802.1x
Compatibility	ONVIF, PSIA, CGI
Max. User Access	20 users
Smart Phone	iPhone, iPad, Android, Windows Phone
Auxiliary Interface	
Memory Slot	Micro SD, Max 128GB
RS485	1
Alarm	2/1 channel In/Out
General	
Power Supply	DC12V/AC24V, PoE (802.3af)
Power Consumption	Max 10W (ABF&ICR on)
Working Environment	-30°C~+60°C, Less than 95% RH
Ingress Protection	N/A
Dimensions	74.1mm×65.5mm×135.4mm
Weight	0.3Kg

Accessory (Optional)



Mailing Address

Snappy
Orlyplein 85
1043 DS Amsterdam
The Netherlands

Contact Details

Tel : +31 (0) 204037397
Fax : +31 (0) 204037310
Email : sales1@snappyeurope.com
sales2@snappyeurope.com
Website : www.snappyeurope.com