



2MP Full HD WDR Network LXIR Bullet Camera

IP-B62FC

Features

1/2.7" 2Megapixel progressive scan CMOS

Support H.264&MJPEG dual codec

25/30fps@1080P(1920× 1080)

Smart Detection supported

WDR(120dB), Day/Night(ICR),

3DNR, AWB, AGC, BLC

Multiple network monitoring:

Web viewer, Snappy Universal CMS

3.6mm fixed lens (6mm optional)



1/1 Alarm in/out, 1/1 audio in/out(only for -AS)

Max. IR LEDs Length 50m

Micro SD memory (only for -AS), IP67, PoE



Dimensions (mm)

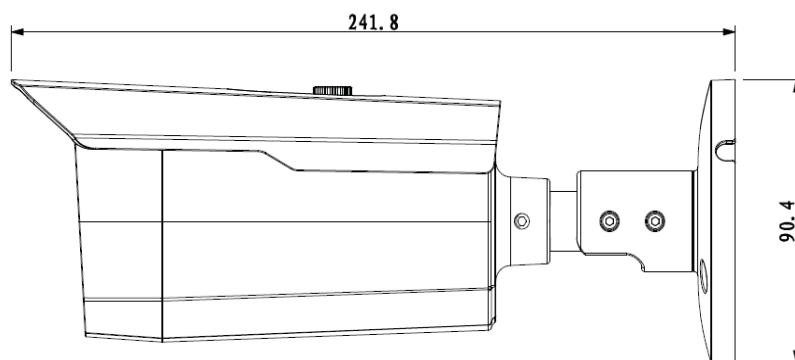

Technical Specifications

Model		IP-B62FC	
Camera			
Image Sensor		1/2.7" 2Megapixel progressive scan CMOS	
Effective Pixels		1920(H)×1 080(V)	
Scanning System		Progressive	
Electronic Shutter Speed		Auto/Manual, 1/3 (4)~1/100000s	
Min. Illumination		0.01Lux/F2.0 (Color) , 0Lux/F2.0(IR on)	
S/N Ratio		More than 50dB	
Video Output		N/A	
Camera Features			
Max. IR LEDs Length		80m	
Day/Night		Auto(ICR)/Color/B/W	
Backlight Compensation		BLC / HLC / WDR (120dB)	
White Balance		Auto/Sunny/Night/Outdoor/Customized	
Gain Control		Auto/Manual	
Noise Reduction		3D	
Privacy Masking		Up to 4 areas	
Lens			
Focal Length		6mm	
Max Aperture		F2.0	
Focus Control		Manual	
Angle of View		H: 63°	
Lens Type		Fixed lens	
Mount Type		Board-in Type	
Video			
Compression		H.264 /H.264H/ H.264B / MJPEG	
Resolution		1080P (1920×1080)/ 720P(1280×720) / D1(704×576 /704×480) / CIF(352×288 /352×240)	
Frame Rate	Main Stream	1080P/ 720P (1~ 25/30fps)	
	Sub Stream	D1/CIF(1~ 25/30fps)	
	Third Stream	720P(1~13/4fps)	
Bit Rate		H.264: 32Kbps~ 10Mbps	
Corridor Mode		Support	
Audio			
Compression		G.711a/ G.711u/ AAC(only for-AS)	
Interface		1/1 channel In/Out(only for-AS)	
Smart Function (Optional)			
Smart detection		Tripwire	
		Intrusion	
		Abandoned/Missing	
		Scene Change	
		Audio detect	

	Face detect
Network	
Ethernet	RJ-45 (10/100Base -T)
Wi-Fi	N/A
Protocol	IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour, 802.1x
Compatibility	ONVIF, PSIA, CGI
Max. User Access	20 users
Smart Phone	iPhone, iPad, Android, Windows Phone
Auxiliary Interface	
Memory Slot	Micro SD Max 128GB(only for -AS)
RS485	N/A
Alarm	1/1 channel In/Out (only for -AS)
PIR Sensor Range	N/A
General	
Power Supply	DC12V, PoE (802.3af)
Power Consumption	Max 3.7W
Working Environment	-30°C~+60°C, Less than 95% RH
Ingress Protection	IP67
Vandal Resistance	N/A
Dimensions	Φ 90.4mm×241.8mm
Weight	0.61Kg(with package 0.80kg)

Accessory (Optional)



Mailing Address

Snappy
Orlyplein 85
1043 DS Amsterdam
The Netherlands

Contact Details

Tel : +31 (0) 204037397
Fax : +31 (0) 204037310
Email : sales1@snappyeurope.com
sales2@snappyeurope.com
Website : www.snappyeurope.com