



2MP Full HD WDR Network IR-Bullet Camera





Features

1/2.7" 2Megapixel progressive scan CMOS
Support H.264&MJPEG dual codec
25/30fps@1080(1920× 1080)
Smart Detection supported
WDR(120dB), Day/Night(ICR), 3DNR, AWB, AGC, BLC
Multiple network monitoring:
Web viewer, CMS(DSS/PSS) & DMSS
2.7mm ~12mm motorized lens
2/1 Alarm in/out, 1/1 audio in/out
Max. IR LEDs Length 50m
Micro SD memory, IP67, PoE

IP-BP2MVFWC

Dimensions (mm)

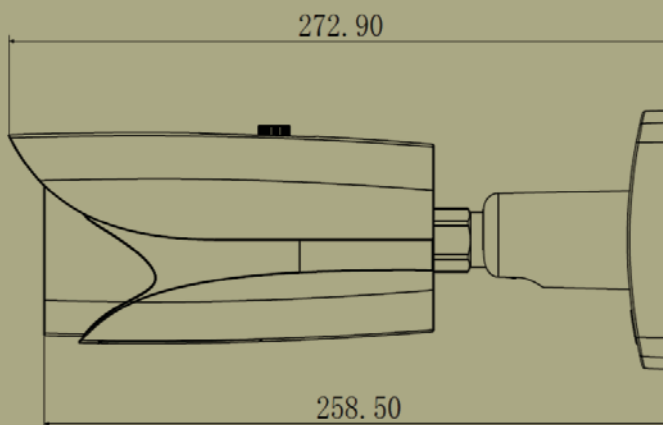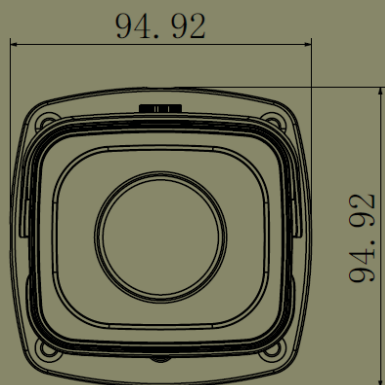

Technical Specifications

Model		IP-BP2MVFWC
Camera		
Image Sensor		1/2.7" 2Megapixel progressive scan CMOS
Effective Pixels		1920(H) x 1080(V)
Scanning System		Progressive
Electronic Shutter Speed		Auto/Manual, 1/3(4)~1/10 0000s
Min. Illumination		0.01Lux/F1.4(Color) ; 0Lux/F1.4(IR on)
S/N Ratio		More than 50dB
Video Output		1 port
Camera Features		
Max. IR LEDs Length		50m
Day/Night		Auto(ICR) / Color / B/W
Backlight Compensation		BLC / HLC / WDR (120dB)
White Balance		Auto/Sunny/Night/Outdoor/Customized
Gain Control		Auto/Manual
Noise Reduction		3D
Privacy Masking		Up to 4 areas
Lens		
Focal Length		2.7mm~12mm
Max Aperture		F1.4
Focus Control		Motorized
Angle of View		H: 99°~34°
Lens Type		Motorized/Auto Iris(DC)
Mount Type		Board-in Type
Video		
Compression		H.264/H.264H/ H.264B/ MJPEG
Resolution		1080P(1920x1080)/ 1.3M (1280x960)/720P(1280x720)/D1(704x576 /704x480)/CIF(352x288 /352x240)
Frame Rate	Main Stream	1080P/720P(1 ~ 25/30fps)
	Sub Stream	D1/CIF(1 ~ 25/30fps)
	Third Stream	720P(1 ~ 13/4fps)
Bit Rate		H.264: 32K bps~ 10Mb ps
Audio		
Compression		G.711a/ G.711u/AAC
Interface		1/1 channel In/Out
Smart Function		
Smart detection	Tripwire	
	Intrusion	
	Abandoned/Missing	
	Scene Change	
	Audio detect	

	Face detect
Network	
Ethernet	RJ-45 (10/100Base -T)
Wi-Fi	N/A
Protocol	IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour, 802.1x
ONVIF	ONVIF ,PSIA,CGI
Max. User Access	20users
Smart Phone	iPhone, iPad, Android, Windows Phone
Auxiliary Interface	
Memory Slot	Micro SD, Max 128 GB
RS485	N/A
Alarm	2/1 channel In/Out
PIR Sensor Range	N/A
General	
Power Supply	DC12V, PoE (802.3af)
Power Consumption	< 11.5W (with IR on, motorized lens working)
Working Environment	-30°C~+60°C, Less than 95% RH
Ingress Protection	IP67
Vandal Resistance	N/A
Dimensions	272.9 mm × 94.9mm× 94.9mm
Weight	1.1 kg

Accessory (Optional)



Mailing Address

Snappy
Orlyplein 85
1043 DS Amsterdam
The Netherlands

Contact Details

Tel : +31 (0) 204037397
Fax : +31 (0) 204037310
Email : sales1@snappyeurope.com
sales2@snappyeurope.com
Website : www.snappyeurope.com