

2MP Full HD WDR Network Vandal-proof IR Dome Camera




IP-DP2MVFWC

Features

- ★ 1/2.7" 2Megapixel progressive scan CMOS
- ★ Support H.264&MJPEG dual codec
- ★ 25/30fps@1080(1920× 1080)
- ★ Smart Detection supported
- ★ WDR(120dB), Day/Night(ICR), 3DNR, AWB, AGC, BLC
- ★ Multiple network monitoring:
Web viewer, Snappy Universal CMS
- ★ 2.7mm ~12mm motorized lens
- ★ 1/1 Alarm in/out, 1/1 audio in/out
- ★ Max. IR LEDs Length 50m
- ★ Micro SD memory, IP67, IK10, PoE

Dimensions (mm)

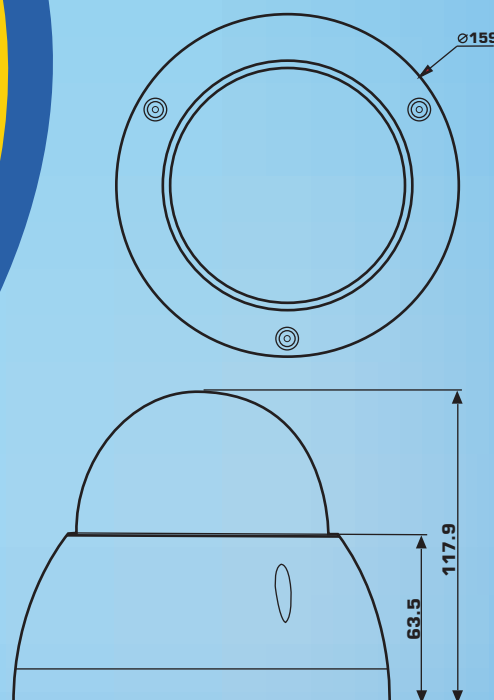

Technical Specifications

Model	IP-DP2MVFWC	
Camera		
Image Sensor	1/2.7" 2Megapixel progressive scan CMOS	
Effective Pixels	1920(H) x 1080(V)	
Scanning System	Progressive	
Electronic Shutter Speed	Auto/Manual, 1/3(4)~1/100 000s	
Min. Illumination	0.01Lux/F1.4(Color) ; 0Lux/F1.4(IR on)	
S/N Ratio	More than 50dB	
Video Output	1 port	
Camera Features		
Max. IR LEDs Length	50m	
Day/Night	Auto(ICR) / Color / B/W	
Backlight Compensation	BLC / HLC / WDR (120dB)	
White Balance	Auto/Sunny/Night/Outdoor/Customized	
Gain Control	Auto/Manual	
Noise Reduction	3D	
Privacy Masking	Up to 4 areas	
Lens		
Focal Length	2.7mm~12mm	
Max Aperture	F1.4	
Focus Control	Motorized	
Angle of View	H: 99°~34°	
Lens Type	Motorized/ Auto Iris(DC)	
Mount Type	Board -in Type	
Video		
Compression	H.264 /H.264H/ H.264B/ MJPEG	
Resolution	1080P(1920x1080)/ 1.3M (1280x960)/720P(1280x720)/D1(704x576 /704x480)/CIF(352x288 /352x240)	
Frame Rate	Main Stream	1080P/ 720P(1 ~ 25/30fps)
	Sub Stream	D1/CIF(1 ~ 25/30fps)
	Third Stream	1080P/720p(1 -25fps)
Bit Rate	H.264: 32K ~ 10M bps	
Corridor Mode	Support	
Audio		
Compression	G.711a/ G.711u/ AAC	
Interface	1/1 channel In/Out	
Smart Function		
Smart detection	Tripwire	
	Intrusion	
	Abandoned/Missing	
	Scene Change	

	Audio detect
	Face detect
Network	
Ethernet	RJ-45 (10/100Base -T)
Wi-Fi	N/A
Protocol	IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour, 802.1x
ONVIF	ONVIF,PSIA,CGI
Max. User Access	20users
Smart Phone	iPhone, iPad, Android, Windows Phone
Auxiliary Interface	
Memory Slot	Micro SD, Max 128 GB
RS485	N/A
Alarm	1/1 channel In/Out
PIR Sensor Range	N/A
General	
Power Supply	DC12V(AC 24V optional), PoE (802.3af)
Power Consumption	Max 10 W (with IR on, motorized lens working)
Working Environment	-30°C~+60°C, Less than 95% RH
Ingress Protection	IP67
Vandal Resistance	IK10
Dimensions	Φ 159mm×117.9mm
Weight	0.8Kg

Accessory (Optional)



Mailing Address

Snappy
Orlyplein 85
1043 DS Amsterdam
The Netherlands

Contact Details

Tel : +31 (0) 204037397
Fax : +31 (0) 204037310
Email : sales1@snappyeurope.com
sales2@snappyeurope.com
Website : www.snappyeurope.com