



5Megapixel Full HD Network Motorized IR-Bullet Camera



IP-B5MVFC

Features

- 1/2.5" 5Megapixel progressive scan CMOS
- H.264 & MJPEG dual-stream encoding
- Max 12fps@5M(2560× 1920)&25/30fps @1080P(1920× 1080)
- DWDR, Day/Night(ICR), 3DNR, Auto Iris, AWB, AGC, BLC
- Multiple network monitoring: Web viewer, Snappy Universal CMS
- 4~9mm vari-focal motorized lens
- 2/1 alarm in/out
- Max. IR LEDs length 30m
- Micro SD memory, IP66, PoE

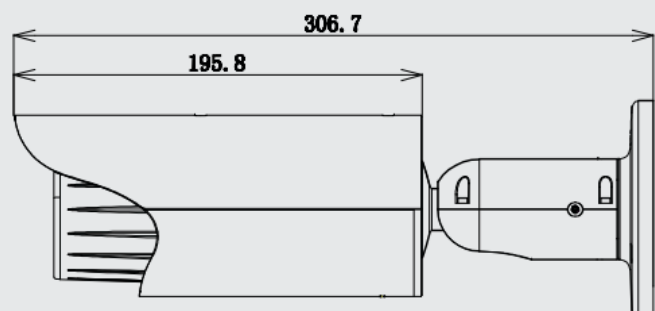

Technical Specifications

Model		IPC -HFW 5502C
Camera		
Image Sensor		1/2.5" 5Megapixel CMOS
Effective Pixels		2560(H)x1920(V)
Scanning System		Progressive
Electronic Shutter Speed		Auto/Manual, 1/3 (4)~1/10000s
Min. Illumination		Color: 0.01Lux/F1.6; 0Lux/F1.6(IR on)
S/N Ratio		More than 50dB
Video Output		1 channel , BNC(1.0Vp -p/75Ω)
Camera Features		
Max. IR LEDs Length		30m
Day/Night		Auto(ICR) / Color / B/W
Backlight Compensation		BLC / HLC / DWDR
White Balance		Auto
Gain Control		Auto/Manual
Noise Reduction		3D
Privacy Masking		Up to 4 areas
Lens		
Focal Length		4~9mm motorized
Max Aperture		F1.6
Focus Control		Auto
Angle of View		H: 82.4°(Wide)~ 36.1°(Tele)
Lens Type		Motorized /Auto Iris(DC)
Mount Type		Board-in Type
Video		
Compression		H.264 / M JPEG
Resolution		5M(2560×1920)/3M(2048 ×1536)/ 1080P(1920×1080)/ 720P(1280×720) / D1(704×576) / CIF(352×288) /
Frame Rate	Main Stream	5M(1~ 12fps)/3M(1~ 20fps)/1080P/720P (1 ~ 25/30fps)
	Sub Stream	D1/CIF(1 ~ 25/30fps)
Bit Rate		H.264 H: 32K ~ 8192K bps
Audio		
Compression		G.711a / G.711u / PCM
Interface		1/1 channel In/Out
Network		
Ethernet		RJ-45 (10/100Base -T)
Wi-Fi		N/A
Protocol		IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour
Compatibility		ONVIF ,PSIA,CGI

Max. User Access	20 users
Smart Phone	iPhone, iPad, Android, Windows Phone
Auxiliary Interface	
Memory Slot	Micro SD, Max 64GB
RS485	N/A
Alarm	2/1 channel In/Out
PIR Sensor Range	N/A
General	
Power Supply	DC12V (AC24V optional), PoE (802.3af)
Power Consumption	<8.5W
Working Environment	-30°C~+60°C (-H: -40°C~+60 °C), Less than 95%RH
Ingress Protection	IP66
Vandal Resistance	N/A
Dimensions	φ104mm × 306.7 mm
Weight	1.25Kg

Accessory (Optional)



Mailing Address

Snappy
Orlyplein 85
1043 DS Amsterdam
The Netherlands

Contact Details

Tel : +31 (0) 204037397
Fax : +31 (0) 204037310
Email : sales1@snappyeurope.com
sales2@snappyeurope.com
Website : www.snappyeurope.com