

5Megapixel Full HD Network Motorized IR Dome Camera





IP-D5MVFIRC

Features

- 1/2.5" 5Megapixel progressive scan CMOS
- H.264 & MJPEG dual-stream encoding
- Max 12fps@5M(2560× 1920)&25/30fps@1080P(1920× 1080)
- DWDR, Day/Night(ICR), 3DNR, Auto Iris, AWB, AGC, BLC
- Multiple network monitoring:
Web viewer, Snappy Universal CMS
- 4~9mm varifocal motorized lens
- Built-in 1/1 alarm in/out
- Max. IR LEDs length 20m
- Micro SD memory, IP66, IK10, PoE,

Dimensions (mm)

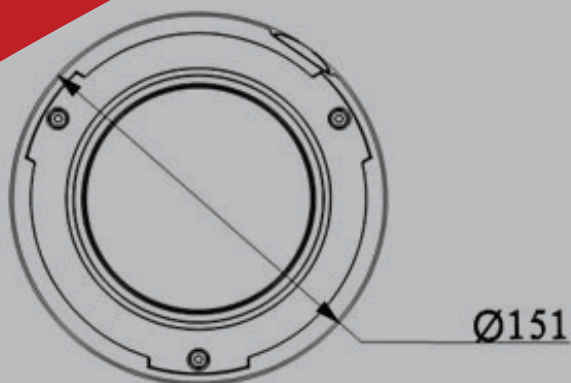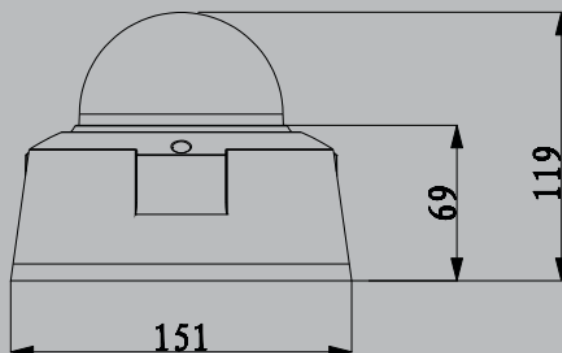

Ordering Information


Without IR model - **IP-D2MVFC**

Technical Specifications

Model		IP-D5MVFIRC	
Camera			
Image Sensor		1/2.5" 5Megapixel CMOS	
Effective Pixels		2560(H)x1 920(V)	
Scanning System		Progressive	
Electronic Shutter Speed		Auto/Manual, 1/3~1/10000	
Min. Illumination		Color: 0.01Lux/F1.6	
S/N Ratio		More than 50dB	
Video Output		1 channel, BNC(1.0Vp -p/75Ω)	
Camera Features			
Max. IR LEDs Length		20m	
Day/Night		Auto(ICR) / Color / B/W	
Backlight Compensation		BLC / HLC / DWDR	
White Balance		Auto	
Gain Control		Auto/Manual	
Noise Reduction		3D	
Privacy Masking		Up to 4 areas	
Lens			
Focal Length		4~9mm motorized	
Max Aperture		F1.6	
Focus Control		Auto	
Angle of View		H: 86.5°(Wide) ~28.6°(Tele)	
Lens Type		Motorized /Auto Iris(DC)	
Mount Type		Board -in Type	
Video			
Compression		H.264 H/H.264B/H.264 / MJPEG	
Resolution		5M(2536 × 1920)/3M(2048 × 1536)/1080P(1920×1080) / 720 P(1280×720) / D1(704×576) / CIF(352×288)	
Frame Rate	Main Stream	5M(1~12fps)/1080P/720P (1~25/30fps)	
	Sub Stream	D1/CIF(1 ~ 25/30fps)	
Bit Rate		H.264 H: 32K ~ 8192K bps	
Audio			
Compression		G.711a / G.711u / PCM	
Interface		1/1 channel In/Out	
Network			
Ethernet		RJ-45 (10/100Base -T)	
Wi-Fi		N/A	
Protocol		IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour	
Compatibility		ONVIF PSIA CGI	
Max. User Access		20 users	

Smart Phone	iPhone, iPad, Android, Windows Phone
Auxiliary Interface	
Memory Slot	Micro SD, Max 64GB
RS485	N/A
Alarm	1/1 channel In/Out
PIR Sensor Range	N/A
General	
Power Supply	DC12V/AC24V, PoE (802.3af)
Power Consumption	<8.5W(AC24V: +2W)
Working Environment	-30°C~+60°C , Less than 90%RH
Ingress Protection	IP66
Vandal Resistance	IK10
Dimensions	Φ151mm×119mm Φ146mm×139.5mm (-DI)
Weight	1.25kg 1.18Kg (-DI)

Accessory (Optional)



Mailing Address

Snappy
Orlyplein 85
1043 DS Amsterdam
The Netherlands

Contact Details

Tel : +31 (0) 204037397
Fax : +31 (0) 204037310
Email : sales1@snappyeurope.com
sales2@snappyeurope.com
Website : www.snappyeurope.com