

2MP Full IP Network Mini IR PTZ Dome Camera


Model: PTZ-D4ZLC



Features

- 4x optical zoom
- H.264 & MJPEG dual-streams encoding
- Max. 25/30fps@1080P(1920x1080) & 50/60fps@720P resolution
- DWDR, Day/Night(ICR), Ultra DNR, Auto iris, Auto focus
- Multiple network monitoring: Web viewer, Snappy Universal CMS
- Max 100°/s pan speed
- Up to 300 presets, 5 auto scan, 8 tour, 5 pattern
- Support intelligent 3D positioning with DH-SD protocol
- Micro SD memory, Built-in Mic, POE/ Wifi optional
- IR Distance up to 30m

Dimensions (mm)

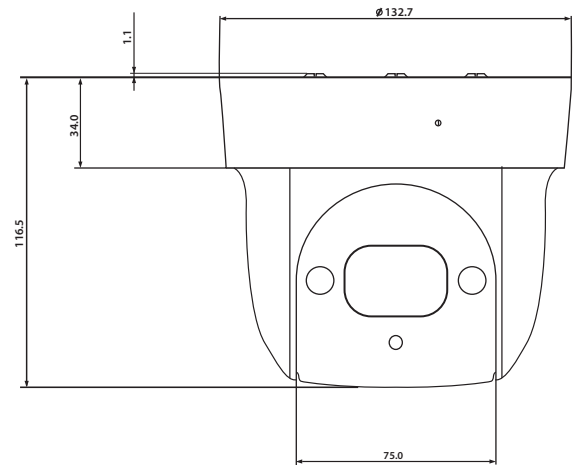

Accessory (optional)



Technical Specification

Model :	PTZ-D4ZLC
Camera	
Image Sensor	1/2.8" CMOS
Effective Pixels	1920(H)x1080(V), 2Megapixels
Scanning System	Progressive
Electronic Shutter Speed	1/1~1/30,000s
Min. Illumination	Color: 0.05Lux@F1.6; B/W: 0.005Lux@F1.6
S/N Ratio	More than 50dB
Camera Features	
Day/Night	Auto(ICR)/Color/B/W
Backlight Compensation	BLC / HLC / DWDR (Digital WDR)
White Balance	Auto, ATW, Indoor, Outdoor, Manual
Gain Control	Auto/Manual
Noise Reduction	Ultra DNR (2D/3D)
Privacy Masking	Up to 4 areas
Digital Zoom	16x
Lens	
Focal Length	2.7mm~11mm(4x Optical zoom)
Max Aperture	F1.6~ F2.8
Focus Control	Auto / Manual
Angle of View	H: 112.5° ~ 39°
PTZ	
Pan/Tilt Range	Pan: 0° ~ 360° limited; Tilt: 0° ~ 90°, auto flip 180°
Manual Control Speed	Pan: 0.1° ~100° /s; Tilt: 0.1° ~60° /s
Preset Speed	Pan: 100° /s; Tilt: 60° /s
Preset	300
PTZ Mode	5 Pattern, 8 Tour, Auto Pan, Auto Scan
Speed Setup	Human-oriented focal length/ speed adaptation
Power up Action	Auto restore to previous PTZ and lens status after power failure
Idle Motion	Activate Preset/ Pan/ Scan/ Tour/ Pattern if there is no command in the specified period
IR Distance	30m
Video	
Compression	H.264 / MJPEG
Resolution	1080P(1920×1080)/ 720P(1280×720) / D1(704×576/ 704×480) /CIF(352×288/352×240)
Frame Rate	Main Stream Sub Stream
	1080P(1 ~ 25/30fps)/ 720P (1 ~ 50/60fps) D1/CIF(1 ~ 25/30fps)
Bit Rate	H.264: 448K ~ 8192Kbps, MJPEG: 5120K ~ 10240Kbps
Audio	
Compression	G.711a / G.711Mu(32kbps)/ PCM(128kbps)
Interface	Built-in Mic
Network	
Ethernet	RJ-45 (10/100Base-T)
Wi-Fi	N/A
Protocol	IPv4/ IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour, 802.1x
ONVIF	ONVIF Profile S
Max. User Access	20 users
Smart Phone	iPhone, iPad, Android, WindowsPhone
Auxiliary Interface	
Memory Slot	Micro SD, Max 64GB
General	
Power Supply	DC12V,PoE
Power Consumption	10W, 13W (IR on)
Working Environment	-30°C ~ 60°C, Less than 90% RH
Dimensions	Φ132.7 (mm) x 116.5 (mm)
Weight	0.95kg

Mailing Address

VOSTOK Trading L.L.C,
304, 3rd Floor, Al Tawhidi Building,
Khaleed Bin Waleed Road,
P.O. Box: 27106 - Dubai,
UNITED ARAB EMIRATES.

www.snappy.ae

Contact Details

Tel: (+971 4) 3558816
Fax: (+971 4) 3558817
Email : sales1@snappy.ae /
sales2@snappy.ae /
sales3@snappy.ae