

2Mp Full HD 30x Starlight Network IR Positioning System






PTZ-BX30ZLC

Features

- Powerful 30x optical zoom
- Star light camera, excellent low-light performance
- Support Triple-stream encoding
- Max 60fps@720P and 30fps@1080P resolution
- Defog, Wiper, Ultra DNR, Ultra low bitrate, EIS, ROI, Day/Night(ICR), Auto iris, Auto focus
- 120dB WDR
- Support Auto tracking and IVS
- Pan range: 360° endless, speed up to 160°/s
- Up to 300 Presets, 8 Tour, 5 Pattern, 5 Auto scan
- Support intelligent 3D positioning
- IR Distance up to 200m, IP66
- Multiple network monitoring: Web viewer, Snappy Universal CMS

Dimensions (mm)

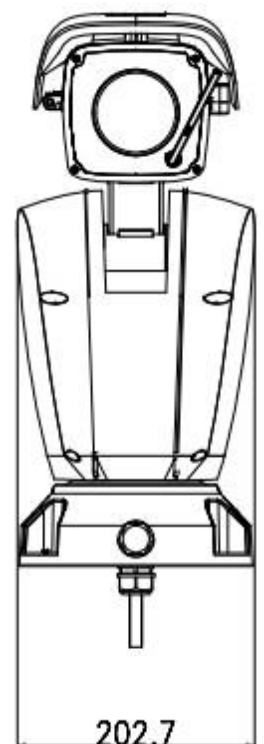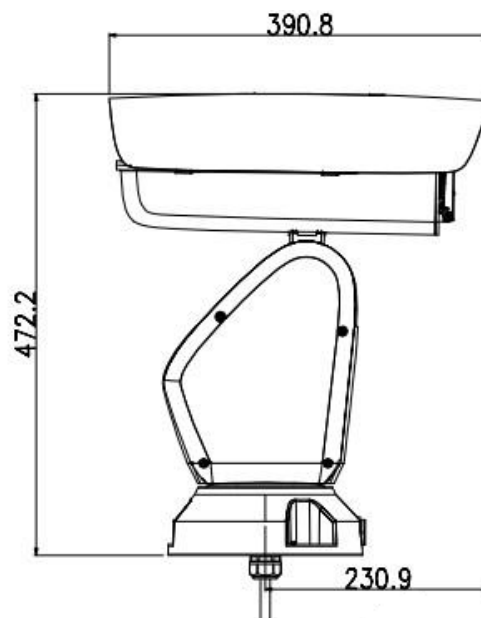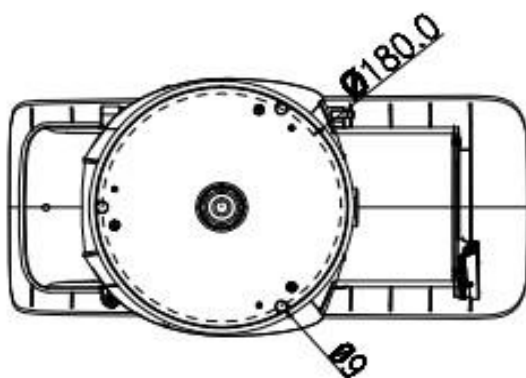

Technical Specifications

Model	PTZ-BX30ZLC
Camera	
Image Sensor	1/1.9" Exmor CMOS
Effective Pixels	1920(H) x 1080(V), 2 Megapixels
Scanning System	Progressive
Electronic Shutter Speed	1/1 ~ 1/30,000s
Min. Illumination	Color: 0.001Lux@F1.5, B/W: 0.0001Lux@F1.5, 0Lux (IR on)
S/N Ratio	More than 55dB
Video Output	BNC(1.0Vp-p/75 Ω), PAL / NTSC
Camera Features	
Day/Night	Auto(ICR) / Color / B/W
Backlight Compensation	BLC / HLC / WDR(120dB)
White Balance	Auto, ATW, Indoor, Outdoor, Manual
Gain Control	Auto / Manual
Noise Reduction	Ultra DNR (2D/3D)
Privacy Masking	Up to 24 areas
Digital Zoom	16x
Defog	On / Off
ROI	Support
Wiper	Support
Lens	
Focal Length	6mm ~ 180mm (30x Optical zoom)
Max Aperture	F1.5 ~ F4.3
Focus Control	Auto / Manual
Angle of View	H: 61.2° ~ 2.32°
Close Focus Distance	100mm ~ 1500mm
PTZ	
Pan/Tilt Range	Pan: 0° ~ 360° endless; Tilt: -90° ~ 45°
Manual Control Speed	Pan: 0.1° ~160° /s; Tilt: 0.1° ~60° /s
Preset Speed	Pan: 0.1° ~160° /s; Tilt: 0.1° ~60° /s
Preset	300
PTZ Mode	5 Pattern, 8 Tour, 5 Auto Pan, 5 Auto Scan
Positioning Accuracy	±0.1°
Speed Setup	Human-oriented focal length/ speed adaptation
Power up Action	Auto restore to previous PTZ and lens status after power failure
Idle Motion	Activate Preset/ Pan/ Scan/ Tour/ Pattern if there is no command in the specified period
Time Task	Auto activation of Preset/ Pan/ Scan/ Tour/ Pattern by preset -time
IR Distance	200m
Audio	
Compression	G.711a / G.711u(32kbps)/ PCM(128kbps)
Interface	1/1 channel In/Out

Technical Specifications

Video		
Compression	H.264 / MJPEG	
Resolution	1080P(1920×1080) / 720P(1280×720) / D1(704×576/704×480) / CIF (352×288/352×240)	
Frame Rate	Main Stream	1080P (1 ~ 25/30fps) / 720P(1~50/60fps)
	Sub Stream1	D1/CIF(1 ~ 25/30fps)
	Sub Stream2	720P/D1/CIF(1 ~ 25/30fps)
Bit Rate	H.264: 56K ~ 8192Kbps, MJPEG: 56K ~ 20480Kbps	
Intelligent Function		
Auto Tracking	Single-scene, multiple-scene, panorama-scene	
IVS	Tripwire, Cross Warning Zone, Perimeter Protection, Loitering Detection, Abandoned Object Detection, Missing Object Detection, Illegal Parking, Fast Moving and etc.	
Tracking Trigger Mode	Manual / Auto (alarm triggered)	
Tracking Trigger Event	Targeting, Zoom, Tracking, Recording, Snapshot, Alarm and etc.	
Network		
Ethernet	RJ-45 (10/100Base-T)	
Protocol	IPv4/ IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour, 802.1x	
Compatibility	ONVIF PSIA CGI	
Max. User Access	20 users	
Smart Phone	iPhone, iPad, Android, Windows Phone	
Auxiliary Interface		
Memory Slot	Micro SD, Max 64GB	
RS485	1 port	
Alarm	7/2 channel In/Out	
General		
Power Supply	AC 24V/5A	
Power Consumption	70W/90W(Laser /heater on)	
Working Environment	-40°C ~ 70°C / Less than 95% RH	
Ingress Protection	IP66, All-metal aluminum alloy, 6000V anti-lightning surge	
Dimensions	202.7mm×390.8mm×472.2mm	
Weight	10.5Kg	

Mailing Address

VOSTOK Trading L.L.C.
304, 3rd Floor, Al Tawhidi Building,
Khaleed Bin Waleed Road,
P.O. Box: 27106 - Dubai,
UNITED ARAB EMIRATES.

Contact Details

Tel: (+971 4) 3558816
Fax: (+971 4) 3558817
Email : sales1@snappy.ae /
sales2@snappy.ae /
sales3@snappy.ae