

AI Edge Computer



Model
011-218-EY-HL



IP42



Fanless



DDR4



4K Ultra HD



12VDC



NVIDIA
Jetson
Xavier NX



Allxon
DMS

Features

- NVIDIA® Jetson Xavier™ NX with Volta™ GPU architecture with 384 NVIDIA CUDA® cores
- High AI computing performance for GPU-accelerated processing
- Ideal for edge AI smart city applications
- Supports one 15W GbE PoE for camera
- Wide operating temperature from -30°C to +50°C
- Supports JetPack



Power Protection

DC Version
OVP (over voltage protection)
OCP (over current protection)
UVP (under voltage protection)
SCP (short circuit protection)

Technical Specifications

Standard Color	Silver
Construction	Aluminum extrusion and heavy-duty steel, IP40 (without IP42 cover kit)
AI Accelerator	NVIDIA® Jetson Xavier™ NX
CPU	6-core NVIDIA Carmel ARM® v8.2 64-bit CPU 6 MB L2 + 4 MB L3
GPU	384-core NVIDIA Volta™ GPU with 48 Tensor Cores
System Memory	8GB 128-bit LPDDR4x onboard
Carried Board	SBC87903
System I/O Outlet	1 x HDMI 2.0 with 4K2K supported 1 x 10/100/1000 Mbps Ethernet (Via Jetson Xavier™ NX) 1 x 10/100/1000 Mbps PoE (Intel® i210-IT ;max. up to 15W) 1 x USB 3.1 Gen2, 1 x USB 2.0 1 x Micro USB 1 x Recovery switch 1 x Reset button 1 x Power button 1 x 12 VDC power input connector 2 x SMA-type antenna connector
Watchdog Time	Built-in Xavier NX
Storage	Onboard 16GB eMMC (via Jetson Nano™) 1 x M.2 Key M 2280 with PCIe x4 NVMe SSD slot 1 x Micro SD slot *The bootable device is supported by eMMC only
Expansion Interface	1 x Full-size PCI Express Mini Card slot (USB + PCI Express signal) 1 x SIM slot
System Indicator	1 x Green LED for system power-on 1 x Yellow LED for M.2 storage
Power Supply	12 VDC screw type
Operating Temperature	-30°C to +60°C (-22°F to +140°F)
Humidity	10% - 95%, non-condensing
Vibration Endurance	3 Grms with M.2 (5 to 500Hz, X, Y, Z directions)
Dimensions	148.6 mm (5.85") (W) x 129.8 mm (5.11") (D) x 34.6 mm (1.36") (H)
Weight (net/gross)	1 kg (2.20lb)/1.6 kg (3.52lb)
Certifications	CE, FCC Class A
OS Support	Linux Ubuntu 18.04

Dimensions

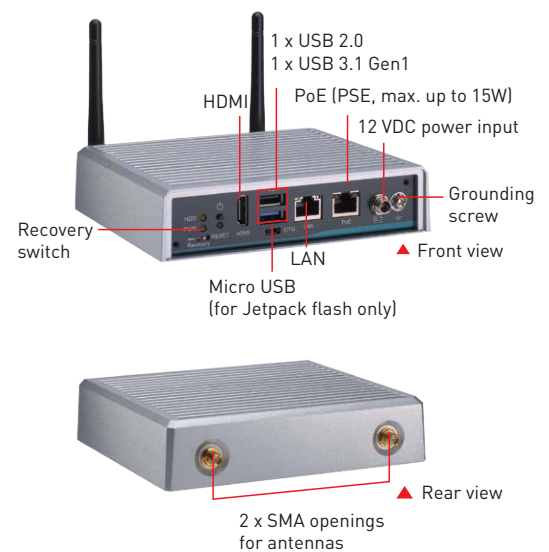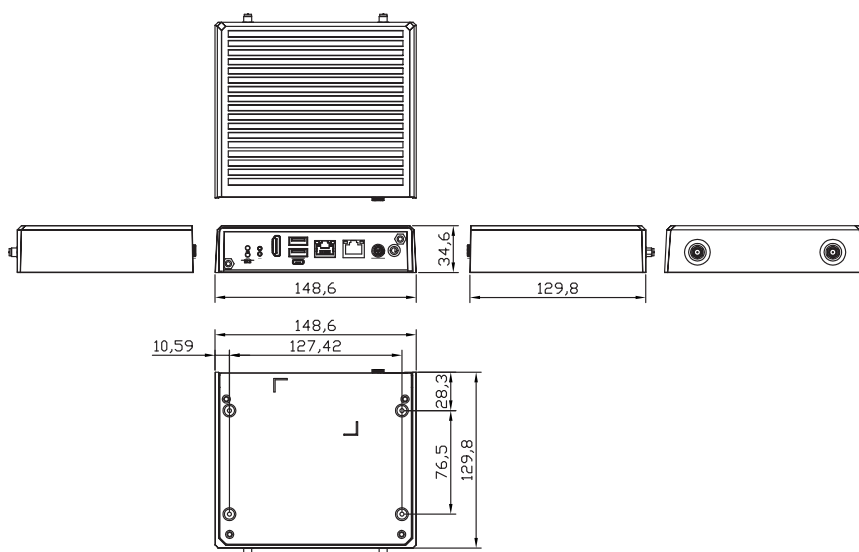

Mailing Address

VOSTOK Trading L.L.C,
304, 3rd Floor, Al Tawhidi Building,
Khaleed Bin Waleed Road,
P.O. Box: 27106 - Dubai,
UNITED ARAB EMIRATES.

Contact Details

Tel: (+971 4) 3558816
Fax: (+971 4) 3558817
Email : sales1@snappy.ae /
sales2@snappy.ae /
sales3@snappy.ae