



Features

- H.265/H.264 codec decoding
- Max 80Mbps Incoming Bandwidth
- Up to 8MP Resolution for Preview and Playback
- HDMI/VGA simultaneous video output
- Support IPC UPnP, 8PoE ports
- Support ANR technology to enhance the storage reliability when the network break down



8 Channel 1U H.265 Standard Network Video Recorder

System Overview

Snappy's NVR-184K8P -SS is the first Standard series NVRs which can support 4K and H.265. And, it has the most reasonable price and best quality. This Standard NVR provides up to 8MP resolution. For applications where details are critical for identification, it provides a powerful image performance with up to 4K resolution. Additionally, the NVR features a mouse shortcut operation menu, remote management and control, centre storage, edge storage, and back up storage.

Designed as a cost-effective, easy installation, this NVR is ideal for a wide range of applications such as public safety, water conservancy, transportation, city centers, education, and financial institutions.

The NVR is compatible with numerous third-party devices making it the perfect solution for surveillance systems with or without a video management system (VMS). Its open architecture supports multi-user access and is compatible with ONVIF 2.4, enabling interoperability when combined with IP cameras.

FUNCTIONS

4K Resolution

The NVR supports 4K ultra HD resolution (3840 x 2160) for recording, live viewing and playback.

Intelligent Video System (Optional)

Working with built-in intelligent video analytics IP cameras, the NVR has the ability to detect and analyze moving objects for improved video surveillance. The NVR provides optional standard intelligence at the edge allowing detection of multiple object behaviors such as abandoned or missing objects. IVS also supports Tripwire analytics, allowing the camera to detect when a pre-determined line has been crossed, People Counting, ideal for business intelligence, and Face Detection, for searching or identification of individuals.

Smart Add

With the Smart Add function, the installation of IP system is as easy as an analog system, no matter the NVR with or without a PoE switch embeded. It should be noted that the NVR has to be in the same router as cameras.

ANR (Automatic Network Replenishment Technology)

Video record in SD card in IP cameras when the network breaks down, and after the network recovered, the video will be transferred to NVR and then recorded in it.

Easy4ip

You can monitor at anytime and anywhere with Easy4ip. With this function, you can manage your devices more convenient.

Technical Specification

System

| | |
|------------------|------------------------------|
| Main Processor | Quad-core embedded processor |
| Operating System | Embedded LINUX |

Display

| | |
|---------------------|--|
| Interface | 1 HDMI, 1 VGA |
| Resolution | 3840×2160, 1920×1080, 1280×1024, 1280×720, 1024×768 |
| Multi-sceen Display | 1/4/8/9 |
| OSD | Camera title, Time, Video loss, Camera lock, Motion detection, Recording |

Video Detection and Alarm

| | |
|-----------------|--|
| Trigger Events | Recording, PTZ, Tour, Video Push, Email, FTP, Snapshot, Buzzer and Screen Tips |
| Video Detection | Motion Detection, MD Zones: 396 (22 × 18), Video Loss & Tampering |
| Alarm input | N/A |
| Relay Output | N/A |

Playback and Backup

| | |
|-------------------|---|
| Playback | 1/4/8 |
| Search Mode | Time /Date, Alarm, MD and Exact Search (accurate to second), Smart search |
| Playback Function | Play, Pause, Stop, Rewind, Fast play, Slow Play, Next File, Previous File, Next Camera, Previous Camera, Full Screen, Repeat, Shuffle, Backup Selection, Digital Zoom |
| Backup Mode | USB Device/Network |

Storage

| | |
|--------------|---|
| Internal HDD | 1 SATA III Port, Up to 6 TB capacity for each HDD |
| HDD Mode | Single |
| eSATA | N/A |

Auxiliary Interface

| | |
|-------|------------------------|
| USB | 2 USB Ports (2 USB2.0) |
| RS232 | N/A |
| RS485 | N/A |

Third-party Support

| | |
|---------------------|--|
| Third-party Support | Arecont Vision, AXIS, Bosch, Brickcom, Canon, CP Plus, Dynacolor, Honeywell, Panasonic, Pelco, Samsung, Sanyo, Sony, Videotec and more |
|---------------------|--|

Audio and Video

| | |
|-----------------|--|
| IP Camera Input | 8 Channel |
| Two-way Talk | 1 Channel Input, 1 Channel Output, RCA |

Recording

| | |
|-----------------|---|
| Compression | H.265/H.264 |
| Resolution | 8Mp/ 6Mp/ 5MP/ 4MP/ 3MP/ 1080P/ 1.3MP/ 720P etc. |
| Record Rate | 80Mbps |
| Bit Rate | 16Kbps ~ 20Mbps Per Channel |
| Record Mode | Manual, Schedule (Regular, Continuous), MD (Video detection: Motion Detection, Tampering, Video Loss), Stop |
| Record Interval | 1 ~ 120 min (default: 60 min), Pre-record: 1 ~ 30 sec, Post-record: 10 ~ 300 sec |

Network

| | |
|------------------|---|
| Interface | 1 RJ-45 Port (10/100/1000Mbps) |
| Ethernet Port | 1 Independent 1000Mbps Ethernet Port |
| PoE | 8 ports (IEEE802.3at/af) (4Mbps is recommended per channel) |
| Network Function | HTTP, HTTPS, TCP/IP, IPv4/IPv6, UPnP, RTSP, UDP, SMTP, NTP, DNS, IP Filter, PPPoE, DDNS, FTP, IP Search (Support Snappy IP camera, DVR, NVS, etc.), Easy4ip |
| Max. User Access | 128 users |
| Smart Phone | iPhone, iPad, Android |
| Interoperability | ONVIF 2.4, CGI Conformant |

Electrical

| | |
|-------------------|--|
| Power Supply | DC48V/2A |
| Power Consumption | NVR: <8.3W (Without HDD) PoE: Max 25.5w for single port, 80w in total |

Environmental

| | |
|----------------------|---|
| Operating Conditions | -10°C ~ +55°C (+14°F ~ +131°F), 86 ~ 106kpa |
| Storage Conditions | -20°C ~ +70°C (-4°F ~ +158°F), 0 ~ 90% RH |

Construction

| | |
|--------------|--|
| Dimensions | Compact 1U, 260mm×224.9mm×47.6mm (10.2" x 8.9" x 1.9") |
| Net Weight | 0.8kg (1.76 lb) (without HDD) |
| Gross Weight | 1.6kg(3.53 lb)(without HDD) |

Technical Specification


Certifications

| | |
|-----|--|
| CE | EN55032, EN55024, EN50130-4, EN60950-1 |
| FCC | Part 15 Subpart B, ANSI C63.4-2014 |
| UL | UL60950-1+CAN/CSA C22.2 No.60950-1 |

Ordering Information

| Type | Model Number | Description |
|---------------|---------------|---|
| 8 Channel NVR | NVR-184K8P-SS | 8 Channel 1U 8PoE 4K&H.265 Standard Network Video Recorder |
| Accessories | N/A | N/A |

Dimensions

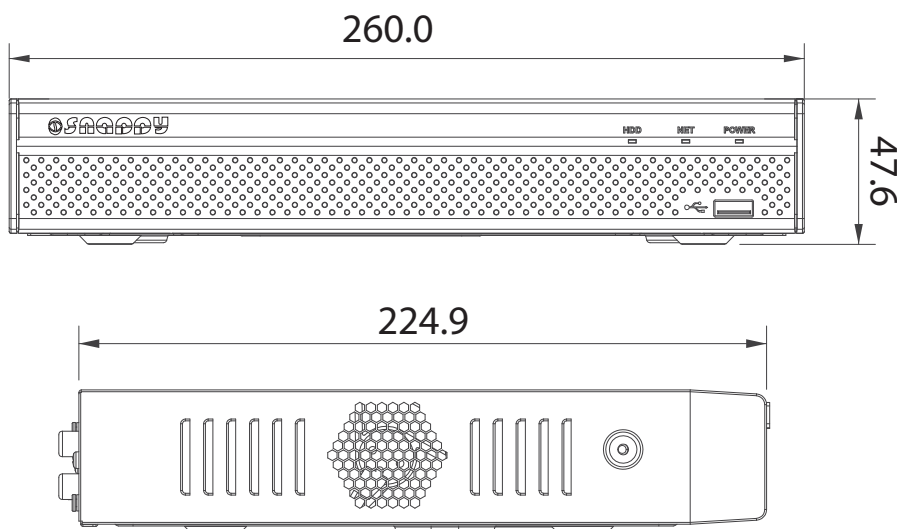

Mailing Address: VOSTOK Trading L.L.C,
304, 3rd Floor, Al Tawhidi Building,
Khaleed Bin Waleed Road,
P.O. Box: 27106 - Dubai,
UNITED ARAB EMIRATES.

Contact Details: Tel: (+971 4) 3558816
Fax: (+971 4) 3558817
Email : sales1@snappy.ae /
sales2@snappy.ae /
sales3@snappy.ae